



1) Electrical and vacuum attachments must be removed from top section.



2) Pull plugs and vacuum tube.



3) Pull lower cord and vacuum tube through lower end of conduit.



4) Top should look like this.



5) Remove filter clamp knobs. There are 4



6) Remove primary filter.




7) Remove secondary filter.



8) Remove final filter.




9) Remove screws on left side.  
There are 4 front to back

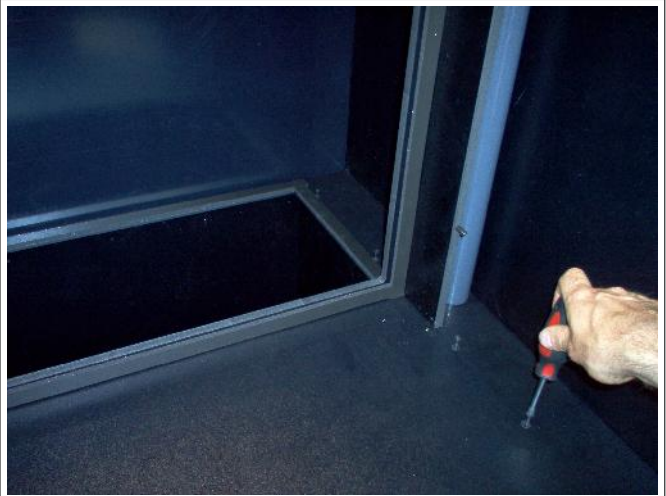

10) Remove screws on right side.  
There are 4 front to back.



11) Remove screws on back.  
There are 5.

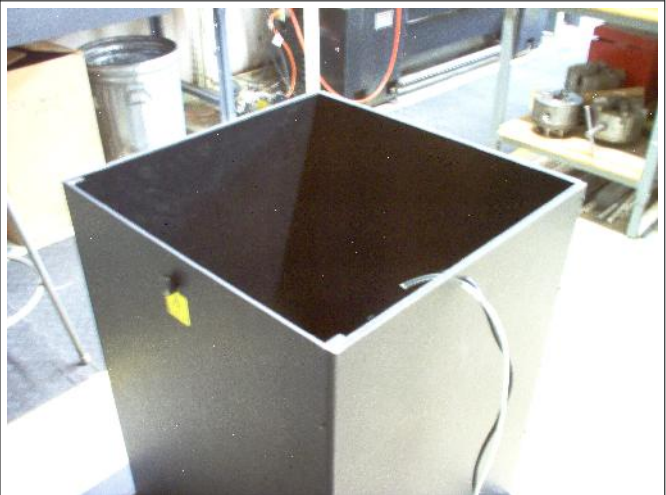

12) Lift top of unit away using an assistant.